

Ultra Flood Light

G-COMIN

CO-T500-1200W

175LM/W




Features:

- High lumen
- Replaceable lens
- Adjustable module
- Aluminium cooling fin
- IP Grade: IP66

Areas of application:

Golf course / Airport / Subway / Overpass / Petrol stations / Football field / Port / etc

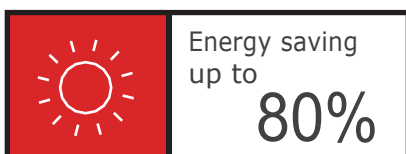

RoHS



1 Parameter



Wattage	CRI	Power Factor
1200W	Ra>70	>0.95
Operating Temp.	IP Grade	Luminous Flux
-40℃ ~ +60℃	IP66	210,000LM±5%
Beam Angle	Rated Voltage	
10°/ 30° /60° /90°/120°	AC 100-240V 277V~, 50/60Hz	

2 Beam angle

Multiple angles are available.



10°



30°



60°



90°




120°

3 Installation



1.Pole Installation



2.Wall Installation



4 Dimensions

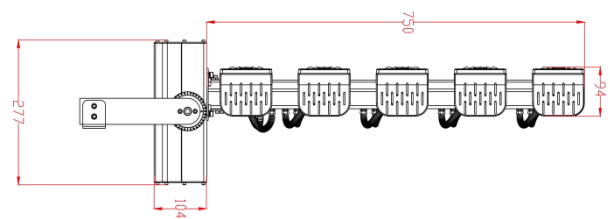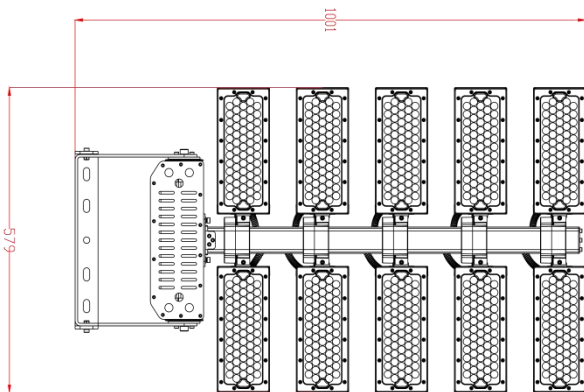

5 Packaging

Net Weight	Size of Carton	Gross Weight of Carton	Box PCS / Carton
24.2KG±5%	96*69*42CM	31.5KG	1