

# Ultra Flood Light

# G-COMIN

## CO-T500-960W

## 175LM/W




### Features:

- High lumen
- Replaceable lens
- Adjustable module
- Aluminium cooling fin
- IP Grade: IP66

### Areas of application:

Golf course / Airport / Subway / Overpass / Petrol stations / Football field / Port / etc

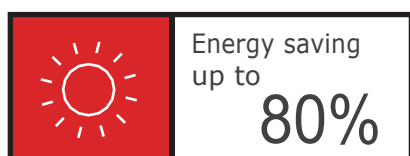

RoHS



## 1 Parameter



| Wattage                    | CRI                           | Power Factor  |
|----------------------------|-------------------------------|---------------|
| 960W                       | Ra>70/80                      | >0.95         |
| Operating Temp.            | IP Grade                      | Luminous Flux |
| -40℃ ~+60℃                 | IP66                          | 168,000LM±5%  |
| Beam Angle                 | Rated Voltage                 |               |
| 10°/ 30°<br>/60° /90°/120° | AC 100-240V 277V~,<br>50/60Hz |               |

## 2 Beam angle

Multiple angles are available.



10°




30°



60°



90°

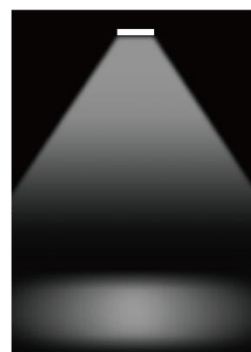


120°

## 3 Installation



1.Pole Installation



2.Wall Installation



## 4 Dimensions

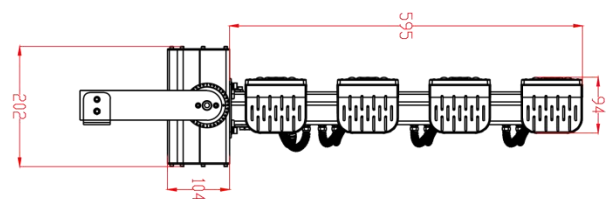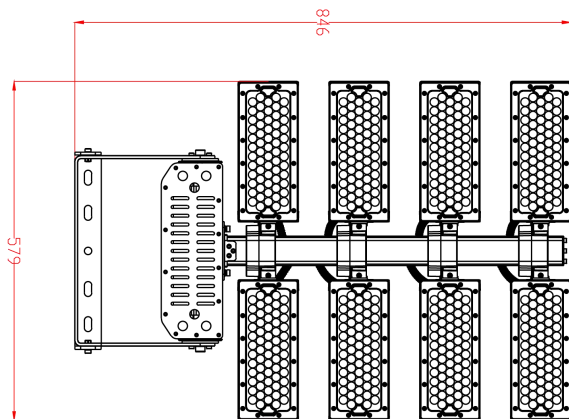

## 5 Packaging

| Net Weight      | Size of Carton | Gross Weight of Carton | Box PCS / Carton |
|-----------------|----------------|------------------------|------------------|
| 19.9KG $\pm$ 5% | 82*69*39CM     | 26KG                   | 1                |