

2022 G2 SD DOWNLIGHT

Ultimate choice of downlight with excellent balance of cost, performance, compatibility.

Integrated dimmable driver complied with new ERP regulation.

2700–3000–4000K selectable with less SKU.

48mm overall height for all kinds of narrow ceilings.

Die-cast aluminum heatsink with better heat dissipation.

Well-designed PMMA lens that guarantee best light distribution for all needs.



1.DIP switch

one light with 2700–3000–4000K three different options or customized ranges.

2.Insulation bracket

Ensure air convection of heatsink while fixture is covered with

3.Vertical tilt angle

15° adjustable which allow to do field fine-tune.

4.Ceiling thickness


suitable for 5–25mm thick ceiling.

5.Overall height

only 48mm that is suitable for all narrow ceiling.

6.Driver

potted driver with solid guarantee to the lifespan and warranty.

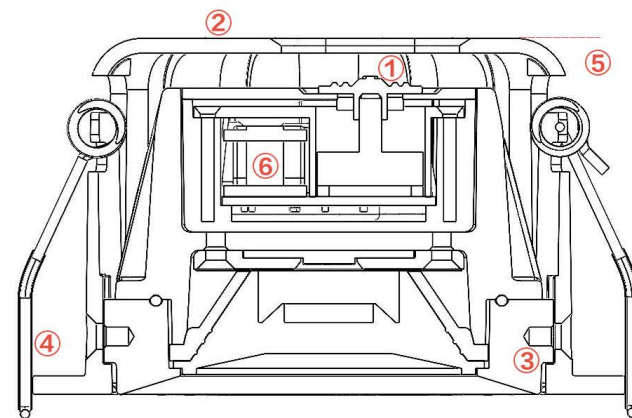

SD Downlight – Recessed Lighting



Product code: BT-SD7WXX

CERTIFICATE
CE, ERP, RoHS

COLOUR
White / Black (9016)



INSTALLATION

Suitable ceiling thickness 5 to 25 mm

MOUNTING

Ceiling recessed | Wall recessed

Dimension(mm)

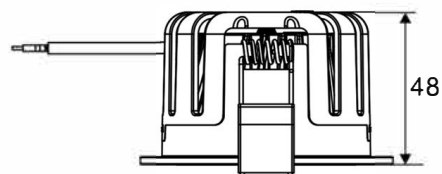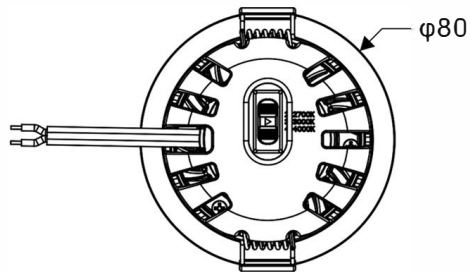

Technical data

Wattage: 7W

Beam: 15/24/36°

CCT: 2700-3000-4000K

Input: 220-240V / 50-60Hz

Warranty: 3 years

Lifespan: 35,000 hours

Lumen: 560lm

Efficiency: 80lm/w

CRI: >90

R9: >50

SDCM: 3 steps

DIM: TRIAC

Remark: 15 degree is only available with single CCT version