


Model: GP-CVM200P Series

Features

- Universal AC Input Range 90 ~ 264VAC.
- Constant Voltage Operation.
- Active PFC Design.
- Protections: OVP / OCP / SCP / OTP.
- High Efficiency 92.5% ~ 93%.
- Fully Insulated Case with IP67 Level.
- Cooling by Free Air Convection (Metal Housing)
- No Load Consumption < 0.5W at 230VAC.
- Suitable for LED Strips and Moving Sign Applications.

Approvals

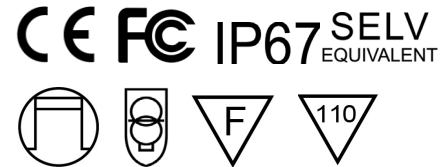

Size

203.2 x 80.3 x 33.5mm (L x W x H)





Specifications

Model No.		GP-CVM200P-12V	GP-CVM200P-24V	GP-CVM200P-36V	GP-CVM200P-48V
Output	DC Voltage	12V	24V	36V	48V
	Rated Current	0~16.7A	0~8.3A	0~5.5A	0~4.15A
	Rated Power	200.4W	199.2W	198W	199.2W
	Ripple & Noise (Max.) Note.2	350mV	350mV	400mV	500mV
	Efficiency at 230VAC (Typ.)	92.5%	93%	93%	93%
	Voltage Tolerance Note.3	± 5%	± 5%	± 5%	± 5%
	Set up time (Max.)	0.5s / 230VAC, 1s / 115VAC, at full load.			
Input	Rated Voltage	100 ~ 240VAC			
	Voltage Range	90 ~ 264VAC			
	Frequency Range	47 Hz ~ 63 Hz			
	AC Current (Max.)	6A at 115VAC / 3A at 230VAC			
	Power Factor	>0.98 at 115VAC / >0.94 at 230VAC at full load. PF ≥ 0.9 at 70% load			
	Total Harmonic Distortion	THD < 20% at 230VAC, full load. Note 4			
	Inrush Current (Max.)	Cold Start 120A at 230VAC			
	Leakage Current	<1mA / 240VAC			
Protections	Over Current	105~180% rated current. Type: Auto recover after fault condition disappeared.			
	Short Circuit	Type: Hiccup mode & recovers after fault condition disappeared.			
	Over Voltage	13~19V	26~38V	38V~50V	50V~65V
	Over Temperature	Type: Hiccup mode (re-power on to recover).			
		Tcase: 100°C ± 10°C Type: Shutdown mode (re-power on to recover).			
Environment	Operation Temp.	-30°C ~ 50°C (Refer to output load derating curve)			
	Operation Humidity	20% ~ 90% RH non-condensing.			
	Storage Temp.	-40 ~ +80°C			
	Storage Humidity	10% ~ 90% RH			

	Vibration	10~500 Hz, 2G 10 min./1 cycle, period for 60 min. each along X, Y, Z axes.
Safety& EMC	Safety Standards	EN61347-1,EN61347-2-13 ,independent,IP67 Approved.
	Withstand Voltage	I/P-O/P: 3.75KVAC I/P-FG:1.88KVAC O/P-FG:0.5KVAC
	Isolation Resistance	I/P-O/P,I/P-FG,O/P-FG:100M ohms / 500VDC at 25°C
	EMI Conduction & Radiation	Compliance to EN55015,FCC part 15
	Harmonic Current	Compliance to EN61000-3-2 Class C($\geq 75\%$ load),EN61000-3-3
	EMS Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11;EN61547,criteria B
Others	MTBF	120K hours min. MIL-HDBK-217F(25°C)
	Dimension(L x W x H)	203.2 x 80.3 x 33.5 mm; 840g/pcs
Note	1. All specifications not specially mentioned are measured at 230VAC and 25°C ambient temperature. 2. Ripple & Noise are measured at 20MHz bandwidth by using a 12" twisted pair-wire terminated with 0.1uf & 47uf parallel capacitor. 3. Voltage Tolerance: includes line regulation, load regulation and set-up tolerance. 4. THD < 25% at 264VAC, full load.	

Derating Curve

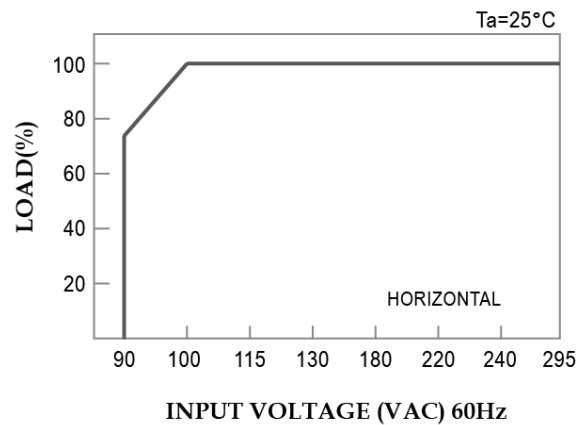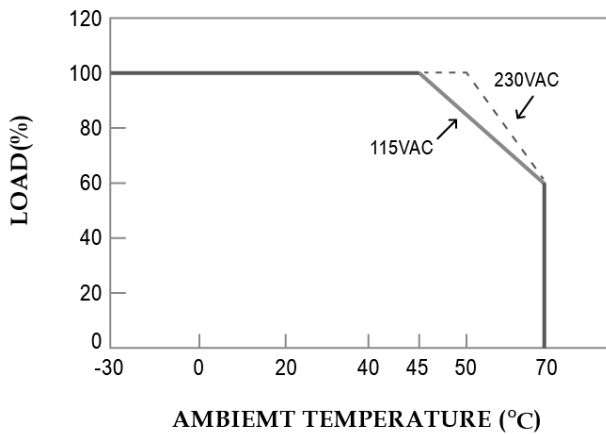

Mechanical Specification

