



BK-5050-60 5 IN 1




- Can meet the requirements of a variety of the white and color light, and improve the color index and consistency for white lights.
- 5 in 1 integrated package solution could achieve more uniform and consistent mixing light
- The matched color control system can achieve uniform color temperature and brightness adjustment.

TECHNICAL DETAILS

Product No.	BK-5050-60 5 IN 1
Power	18W/M
Voltage	DC24V
CRI	80
Led Qty	60LEDs/M
Length/Reel	5M
Working Temperature	-20~50°C
Storage Temperature	-30~80°C
Voltage Range	23 ~25V dc
Reverse Voltage	25V dc


LIGHT DISTRIBUTION

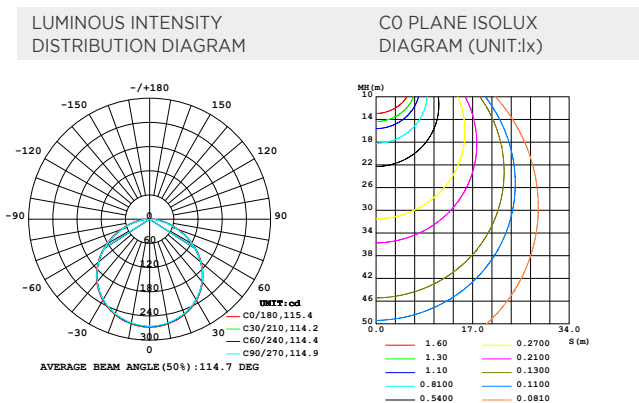


LUMENS PER METER

Color Temperature	
● R	100lm
● G	285lm
● B	52lm
White	
● 2400K	365lm
● 6000K	375lm

DIMENSION

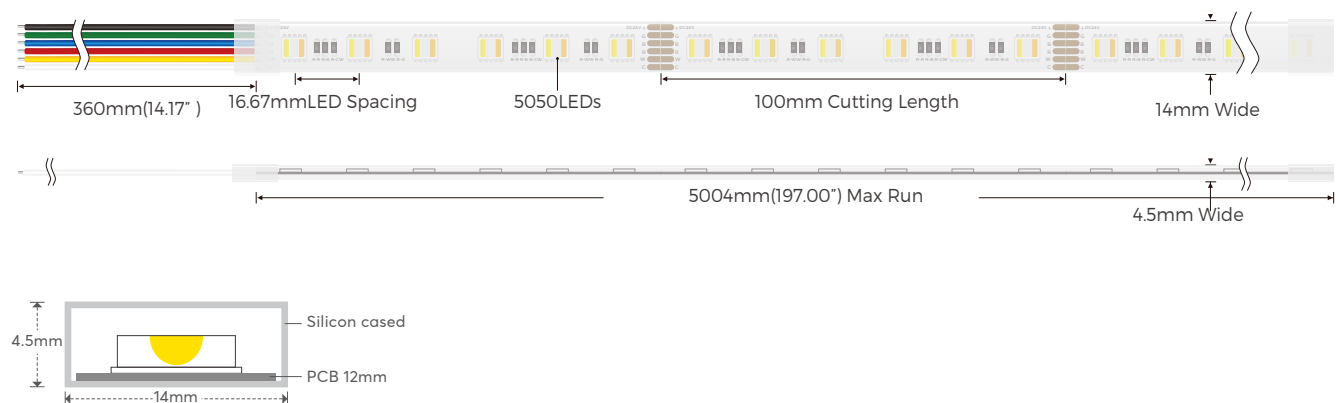

POWER CONNECTION DIAGRAM

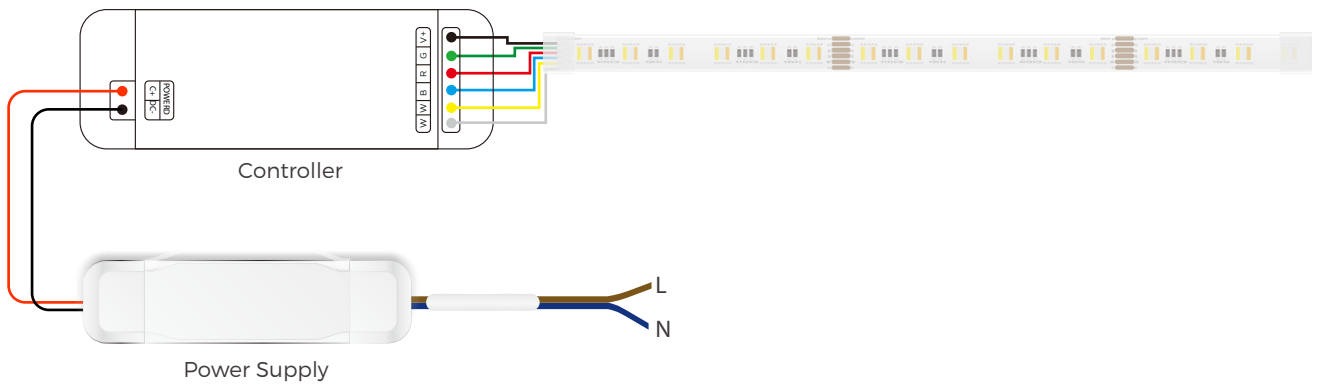


RECOMMENDED ALUMINUM PROFILE

Cover: Transarent/Milky


	Section diagram	Installation	Size	Slot size	PCB Width	Power
			15mm × 7mm	-	≤ 10mm	≤ 10W/M
			24mm × 15mm	21mm × 16mm	≤ 12mm	≤ 18W/M
			17mm × 15mm	-	≤ 12mm	≤ 16W/M
			16mm × 16mm	-	≤ 10mm	≤ 15W/M
			16mm × 16mm	-	≤ 10mm	≤ 15W/M
			20mm × 20mm	-	≤ 15mm	≤ 15W/M
			20mm × 20mm	-	≤ 15mm	≤ 15W/M

INSTALLATION

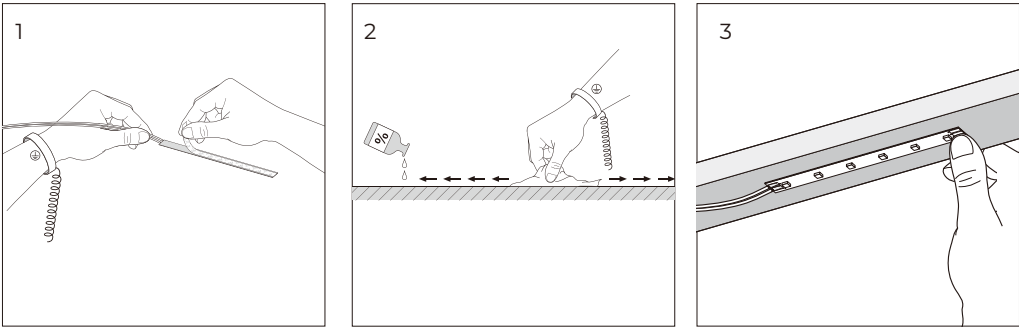

Clean the environment part to be attached with a cloth, as shown in Figure 1, and then tear off the 3M tape on the back of the light belt, and finally stick the light belt on the clean place.

CUTTING

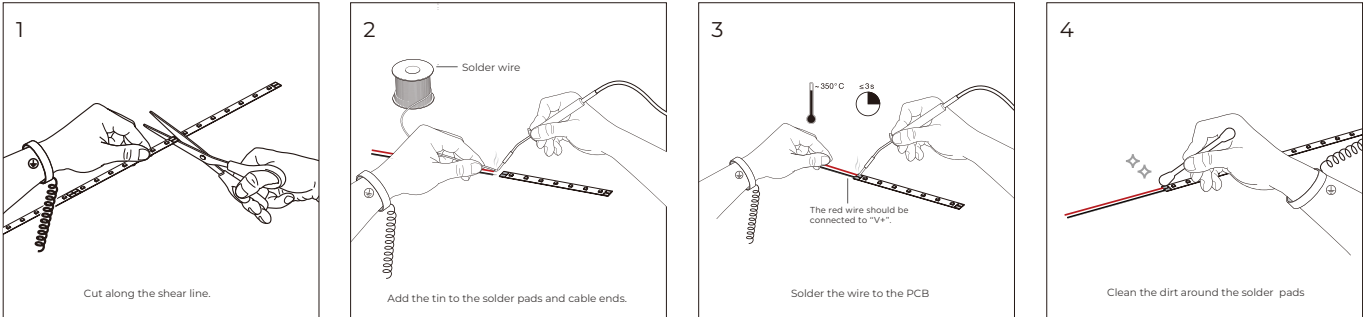

PACKING

N.W /CTN(KG)	G.W/CTN(KG)	QTY / CTN(reel)	CTN Size(cm)
--------------	-------------	-----------------	--------------

-

-

-

-

